




## KIM



### Specification

- HOUSING : LM 6 die cast aluminium and extruded aluminium.
- LIGHT SOURCE : The fitting is designed to operate a LED up to single side 21W or double side 42W.
- DIFFUSER : UV stabilised satine acrylic.
- FINISH : Powder coated.
- MOUNTING : Plinth mounted.
- CONTROL GEAR : The electronic supply is suitable for operation with 220 – 240 volts - 50 hertz single phase.
- FASTENERS : All external screws are stainless steel.
- GASKET : Neoprene gasket.
- INGRESS PROTECTION : IP54.
- MECHANICS : Operating Temperature (Ta) ≤ 35° C.
- Weight : 7.5 Kg.
- Windage : Max. projected areas for mounting 0.198m<sup>2</sup>.
- FEATURES : Single or double light element.
- Hidden mounting for plinth mounted.
- Surge arrester to protect LED supply.

## Dimension

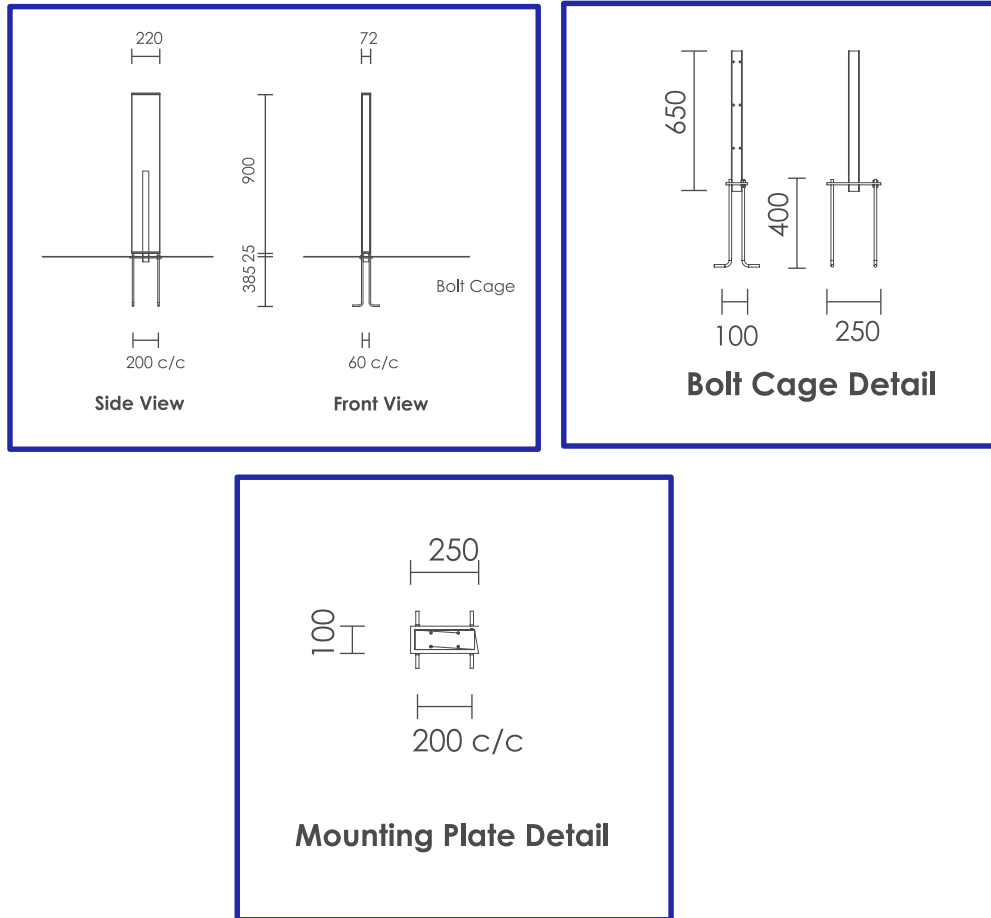

## Technical Information

Code	Power	Normal Flux lm	LED Current (mA)
KIM-SINGLE-21W	21	3078	700
KIM-DOUBLE-42W	42	6156	700

## Specification Options

### Colour Temperature

