

SURFACE DOWNLIGHTERS



ZARA 5"
ZARA 8"





Specification

- Innovative thermal management employing passive cooling
- Colour rendering index (CRI): >80
- The luminaire corresponds to protection class Ik3 at Ip20
- L80/B10 > Service life of 50,000 hours
- Dimmable options DALI, Switchdim, Triac available with correct driver
- Sensor on/off; daylight harvesting compatibility options
- Colour consistency (SDCM) is Mac Adams <3 (SDCM 4 optional)
- Colour temperature: 3000K; 4000K;
- Warrantee of 5 years as per Lightnet standard terms of warrantee
- Emergency version back-up source for 1 or 3 hours remote box only
- Stated Photometric values correspond to operation at 45° 4000k CRI 80.
- The watt and lumen values can vary by $\pm 7,5\%$ Flicker free at <6%

SURFACE DOWNLIGHTERS

Dimension

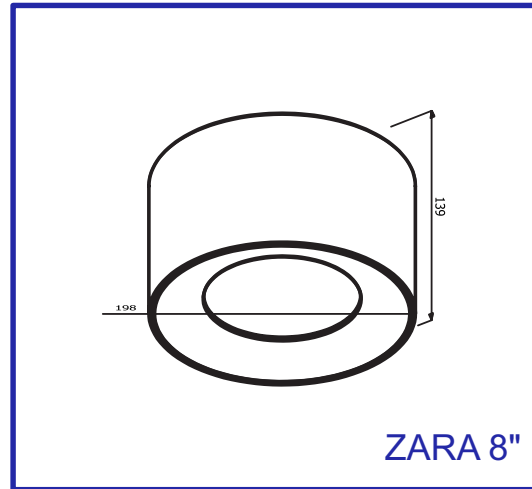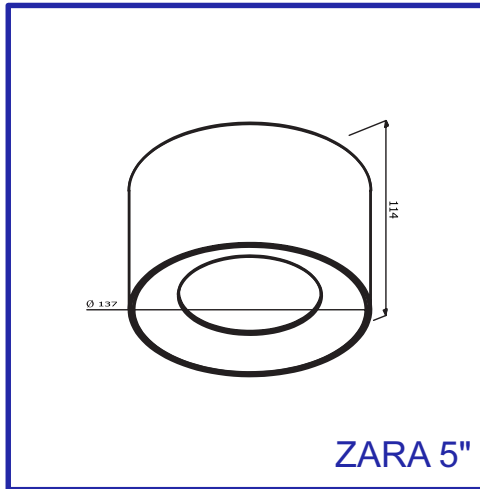

Technical Information

ZARA 5"

Code	Wattage	Running Current mA	CCT	System Lumen	System Efficacy Lm/W
ZARA5-10W	10	250	4000K	894	89
ZARA5-15W	15	350	4000K	1355	90

ZARA 8"

Code	Wattage	Running Current mA	CCT	System Lumen	System Efficacy Lm/W
ZARA8-20W	20	500	4000K	2295	115
ZARA8-24W	24	600	4000K	2755	115

Specification Options

Colour Temperature



Driver

